

Woodpecker 9015-16GT-I


Managed 16 x10/100/1000 RJ45 Industrial Switch

Description

The Woodpecker 9015-16GT-I is a Managed Industrial Switch equipped with 16 port 10/100/1000BASE-T for high-demand of device-connectivity. Engineered with hardened components and enclosed in a rugged IP30 case, with a wide temperature operation from -40°C to 75°C and has excellent tolerance capability to high vibration and shock for high demanding industrial environments.

Woodpecker 9015-16GT-I navigates automation processes in a secure network using SSH, HTTPs, SNMPv3, 802.1X and TACACS+ and offers features to sustain a reliable operation with tools like Virtual Cable Tester, Multicast Address and MAC Flapping that assure data switching and transmission is at the right parameters in factory applications.

As continuous operation is crucial in applications with multiple devices and heavy machinery to permit effective interaction between devices and processes, Woodpecker 9015-16GT-I is connected to a Redundant Power Supply system in case one of the power sources fails and notifies in-site technicians with an alarm about the event.

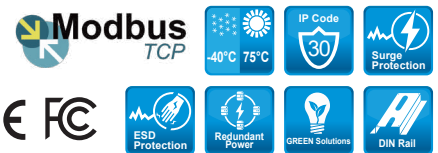

RoHS CE FC

Features Highlight

Robust Performance and Protection

Well-protected in an IP30 casing, the switch provides high level of immunity against EMI and EMS found in industrial environments. Along with those, the Woodpecker 9015-16GT-I is built with various protection features such as ESD Protection, Surge Protection, Over Current Protection, Reverse Polarity Protection and Short Circuit Protection to ensure continuous operation of mission-critical applications even in unstable power conditions.



Code Redundancy

The configuration file of the switch may be lost due to various reasons such as upgrading to a new firmware or power fluctuations and can lead to network down situation. To avoid such situations, the Woodpecker 9015-16GT-I provides a perfect alternate solution using its code redundancy feature with its dual flash. The dual flash memory allows the switch to store a backup file of primary configuration on one flash space. Even if the primary configuration file is lost, the backup file will enable the switch and ensure that your network is running continuously.

Efficient network monitoring and proactive capability

In a network, the issues that impact network performance can be quickly resolved with the Woodpecker 9015-16GT-I most accepted and enhanced traffic management protocols such as SNMP v1/v2c/v3 which gives an enhanced approach for real-time traffic analysis, remote-monitoring and management of individual switches within an industrial network, this avoids high OPEX. The switch is assimilated with intelligent e-mail alarm system and SNMP Trap functionality to detect system abnormality along with Faster Troubleshooting. In addition to this, the device maintains a system log for the subsequent analysis of abnormal and unwanted flaws.

Comprehensive QoS Mechanisms to Assign Priority

Industrial applications need different levels of services delivered to them reliably without any transmission delays and interruptions. The Woodpecker 9015-16GT-I has comprehensive QoS mechanisms which assign priority to applications and sends only specific dedicated traffic to them. In addition, bandwidth management function of the switch allocates high bandwidths to mission-critical communications and reduce the bandwidth to applications that are less critical. With full control of limiting the bandwidth, the administrators can prevent unpredictable errors and utilize the bandwidth more effectively.

Redundant Ring for Faster Network Recovery

Even few seconds of missed communications due to link failures, especially in industrial environment, can cause inconvenience and halt the network. The Woodpecker 9015-16GT-I is designed with various ring protocols like STP, RSTP where the network failure is recovered in time scale of milliseconds by ensuring the real-time network transmission.

Features Highlight


Strong Protection Against Electrical Threats

Woodpecker 9015-16GT-I is incorporated with enhanced Reverse Polarity Protection function to provide safety against wrong combinations of positive and negative poles, which prevents huge internal circuitry damage. The Over Current Protection is designed with a secured fuse component to safeguard the device during sudden increase of current flow. In addition, a Power Isolation concept is used to separate the transmitted data from grounded noise enabling steady and noise free transmission.




Redundant Power Input

When taking the failure impact of mission-critical applications into consideration, the Woodpecker 9015-16GT-I development uses a standard of industrial terminal block along with wide-range redundant power inputs extending from 24/48VDC. The redundant power provides continuous service even if the primary power fails, which results in a reliable and consistent network. In addition to this, the switch is also equipped with an alarm feature to notify the occurrence of power failure. This solution provides you with a quicker respond time and faster troubleshooting.

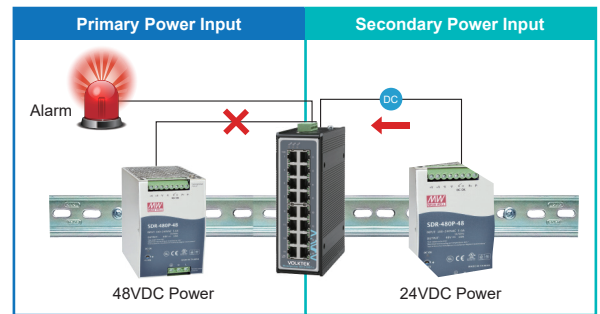


Applications

In designing the Woodpecker 9015-16GT-I, the absolute necessary management functions were integrated to enable the configuration and monitoring of the switches. This allows the Woodpecker 9015-16GT-I switches to bring added value to areas where unmanaged switches cannot deliver the required performance. It can also be used when fully-managed switches are not needed, due to superfluous functionality or complex operation.

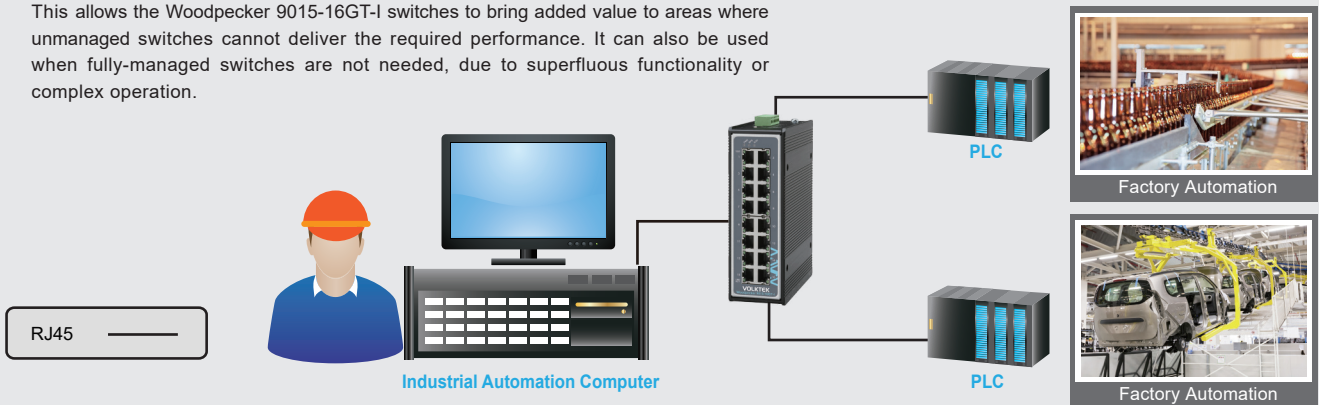

Factory Automation

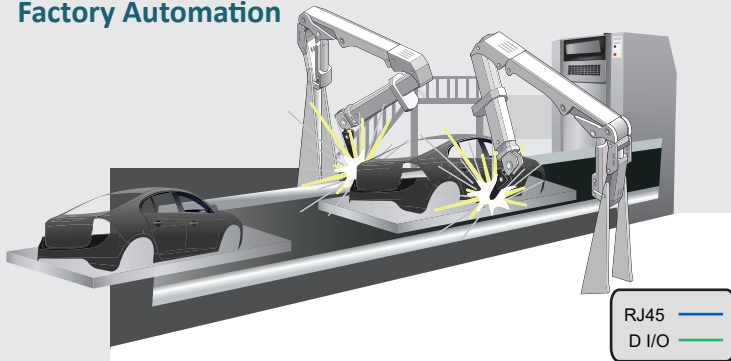


► Redundant Power input

The Woodpecker 9015-16GT-I has dual power inputs to provide a redundant system against power supply disruptions. In case of one power source failure, the other acts as a backup to remain continuous network power for critical industrial applications.

► Relay Output Alarm for Power Failure

The Woodpecker 9015-16GT-I is built with relay contact outputs that trigger alarms to notify network engineers in the event of power failure, and enables them to quickly respond and resolve high priority issues.

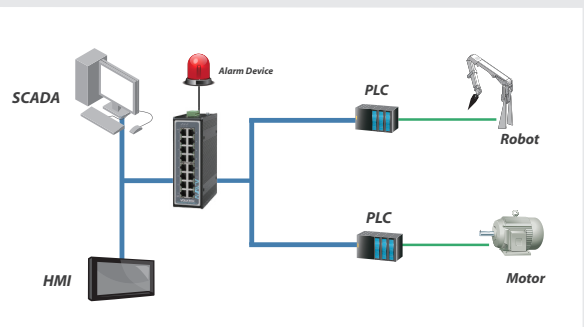

Specifications

| Standards | |
|----------------------------|---|
| IEEE 802.3 | 10BASE-T |
| IEEE 802.3u | 100BASE-TX |
| IEEE 802.3ab | 1000BASE-T |
| IEEE 802.3 | Nway Auto-negotiation |
| IEEE 802.3x | Flow Control |
| IEEE 802.3az | Energy Efficient Ethernet (EEE) |
| IEEE 802.1AB | LLDP |
| IEEE 802.1D | STP |
| IEEE 802.1w | RSTP |
| IEEE 802.1p | Class of Service |
| IEEE 802.1Q | VLAN Tagging |
| IEEE 802.1X | Port Authentication |
| IEEE 802.1ad | QinQ |
| Interface | |
| Ports | 16x10/100/1000BASE-T (RJ45) |
| DIP Switch | Primary, Redundant Power and Drop Alarm Setting |
| LED Panel | PWR, RPS, ALM, 1000, LNK/ACT |
| Features | |
| Performance | Jumbo frame Size: 10KBytes |
| | MAC Table Entries: 8K |
| | Switch Fabric: 32Gbps |
| | L2 Forwarding Rate: 23.8Mpps |
| Management | CLI, Telnet, SSH, HTTP, HTTPS, SNMP v1/v2c, SNMP v3, SNMP Trap, Management VLAN (MVLAN), Firmware upgradable, Configuration Backup/Restore, Syslog, Sntp, LLDP, DHCP Client/Relay/Option82, Port Mirroring, Server (service) control, Port Utilization, Alarm Information, Modbus TCP, Power Down trap, Topology Map, Port Configuration(enable/disable, speed/duplex), ONVIF, Port Statistic, System reboot from remote side, User Account with authority, Auto-provisioning, Email Alarm, TFTP, Virtual Cable Tester, SSL |
| Reliability | STP/RSTP, ERPS v1/v2, Dual Homing, LACP, Static Trunk, Code Redundancy |
| VLAN | IEEE 802.1Q, Port-based VLAN, MAC-based VLAN, Management VLAN, QinQ |
| Traffic Control | 802.1p QoS, Flow Control, Traffic Monitor (Abnormal Traffic Detection), Storm Control, Port Isolation, Loop Detection, MAC Flapping, Storm alarm threshold per port, IGMP snooping (v1/v2/v3), IGMP Throttling, Multicast Address |
| Security | ACL, SSH, HTTPS, SNMPv3, Port-based 802.1X, TACACS+, Port Security, MAC Search, Refusal MAC, MAC Anti-spoofing, Static MAC, DHCP Snooping, DHCP Server Screening, BPDU Guard/Filter, Root Guard, Managed Host, IP Source Guard |
| Power | |
| Input Voltage | Primary inputs:12~60V DC Redundant inputs:12~60V DC |
| Connection | Terminal Block |
| Power Consumption | 18W (12V/1.5A) |
| Alarm Relay | 1A @ 24V DC |
| Mechanical and Environment | |
| Housing | Aluminum (IP30 Protection) |
| Mounting | DIN-Rail |
| Operating Temperature | -40°C~75°C (-40°F~167°F) |
| Storage Temperature | -40°C~85°C (-40°F~185°F) |
| Operating Humidity | 5 to 95% RH (non-condensing) |
| Storage Humidity | 5 to 95% RH (non-condensing) |
| Weight | 840 g (1.2 lb) |
| Dimension (WxHxD) | 50 x 161.5 x 120 mm (1.97 x 6.36 x 4.72 in) |
| Certifications | |
| EMI | FCC Part 15 Subpart B Class A |
| | EN 55022 Class A |
| | EN 60950-1 |
| EMS | EN 55024 |
| | EN 61000-4-2 (ESD) |
| | EN 61000-4-3 (RS) |
| | EN 61000-4-4 (Burst) |
| | EN 61000-4-5 (Surge) |
| | EN 61000-4-6 (CS) |
| EN 61000-4-8 (PFMF) | |
| Shock | IEC 60068-2-27 |
| Freefall | IEC 60068-2-32 |
| Vibration | IEC 60068-2-6 |
| Ordering Information | |
| Woodpecker 9015-16GT-I | Managed 16 x 10/100/1000 RJ45 Industrial Switch |
| Optional Accessories | |
| Power Supply | SDR-120-48: 120W DIN-Rail 48V DC Industrial Power Supply, -25°C~70°C (-13°F~158°F) |

Note :

* Specifications subject to change without notice.

Dimension

